MARION COUNTY SURVEYOR'S OFFICE

DEBRA S. JENKINS MARION COUNTY SURVEYOR SECTION CORNER RECORD SEC. 21 TWN. 15_{N} RNG. 3_{E}

BRYAN F. CATLIN, PLS TECHNICAL SUPERVISOR



Party Chief: Wilcoxen

Crew: Finney


Date: 7-21-09


Type of Marker: Harrison

Method of Establishment: County:10-5-1999

IN S.P.C. E Zone, NAD 83

Name: 15032102 N: 498 339.396 8(m) E: 53 740.609 1(m)



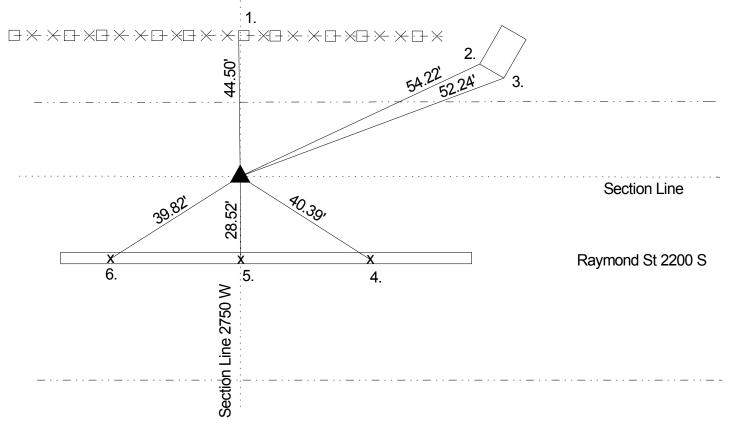

Corner originally set as a post in 1820 by Wm. B Laughlin with the following witnesses: 30" white oak S 39 E 5 links; 12" sugar N 18 W 23 links (Marion County Atlas p.6). A survey by R. Mayhew on 8-25-1859 indicates a set rock with the following witnesses: 12" sugar S 14 E 23 links; 18" sugar S 61.25 W 45 links; 18" mulberry N .5 E 113 links (Wayne Twp. Legal Book p. 48). Corner referenced by Miller on 10-22-1948 and called a brass plug. Corner referenced by Greene on 12-5-86 and called a PK nail over brass plug. Corner referenced by Wilcoxen on 3-9-92 and called a brass plug in steel box. Corner referenced by Kiste on 10-5-1999 and called a brass plug in steel box. Corner excavated on 3-15-04 and a brass plug was found 4" down. A #205 cast iron Harrison monument was set in position of the brass plug. Retied 7-21-09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	44.50'	Due N to face of steel fence post
2.	54.22'	Cut 'x' westerly bolt of high tension tower
3.	52.24'	Cut 'x' in S face of leg for high tension tower
4.	40.39'	Cut 'x' in median
5.	28.52'	Due S to cut 'x' in median
6.	39.82'	Cut 'x' in median